


Circle Light Label

Participate in a more circular world



Many of the lighting solutions we installed back in the 1970s are still working. We're proud of that but, for the well-being our planet, we need to go a step further. Living well within the limits of our planet is one of our objectives and for this, we are integrating another concept under our sustainability umbrella: Circularity

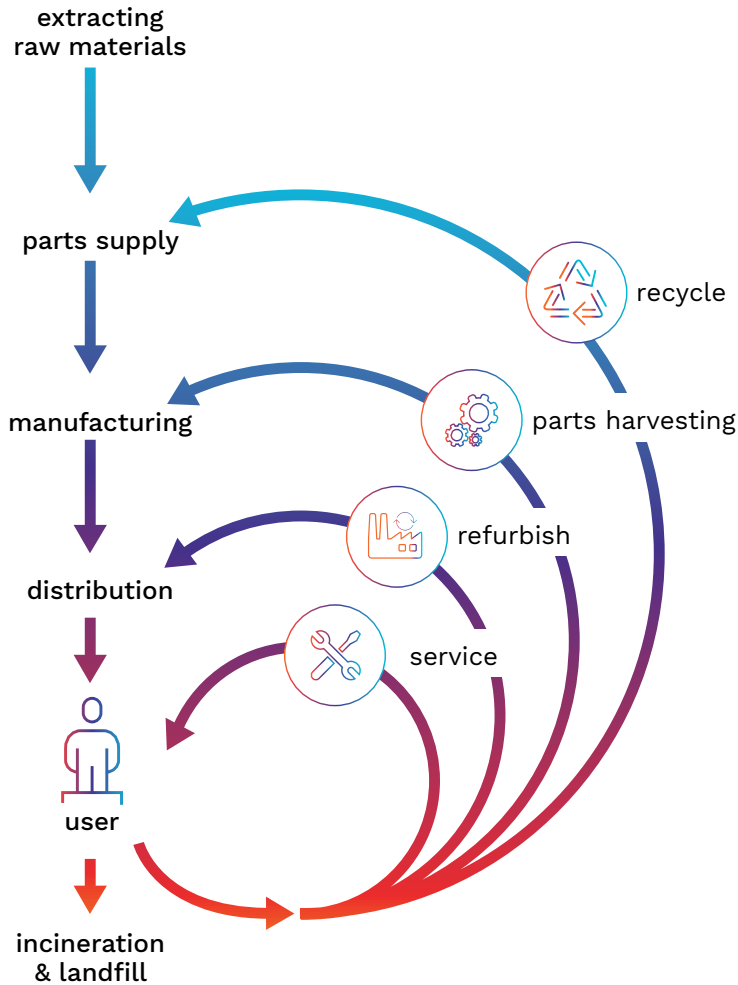

Circularity focuses on reducing the environmental burden by valorising the flow of all materials.

It is mainly defined in opposition to the traditional linear economy: take, make and dispose. In a circular economy, products are part of a value network where they will be used for as long as possible.

Then, depending on their characteristics, they can be reused, refurbished, upgraded or recycled.

Schröder takes circular economy into account, right from the offset. Before we start to design our products, we incorporate it into their DNA.

After a careful analysis of the potential circularity of our luminaires, we decided to introduce a “circular lighting” product label. This label acts as a circular indicator for our customers.

It clearly designates products that are optimised for circular economy through 12 objective criteria.

Circle Light Label



The luminaire obtained a score between 0 and 30



The luminaire obtained a score between 30 and 60








The luminaire obtained a score between 60 and 90



The luminaire obtained a score between 90 and 120

POINTS 0 5 10

LONG-LASTING, LONG USE

		POINTS	0	5	10
PERFORMANCE 	Luminary efficacy ⁽¹⁾	F/P < 110 lm/w	110 lm/w =< F/P < 140 lm/w	140 lm/w =< F/P	
	Rated life of the LEDs	x < L90/100.000	L90/100.000 =< x < L95/100.000	L95/100.000 =< x	
	Mechanical ⁽²⁾	Level 1	Level 2	Level 3	
	Energy control	No control solution	Dimmable	Dynamic	
	Smart ready ⁽³⁾	Not available	Proprietary smart solution ready	Open smart solution ready	
MAINTENANCE 	PARTS WITHDRAWAL ⁽⁴⁾	Opening	Specific tools/ Impossible	Basic tools	Tool free
		Optical unit	Specific tools/ Impossible	Basic tools	Tool free
		Gear plate (driver, SPD, smart, ...)	Specific tools/ Impossible	Basic tools	Tool free
	INFO AVAILABILITY	Product sheet	In the box	On the website	On smart tag
		Installation sheet	In the box	On the website	On smart tag
		Asset data sheet	In the box	On the website	On smart tag
REFURBISH 	SPARE PARTS	Availability ⁽⁵⁾	Product warranty	Announced end of life	10 years after the announced end of life
	UPGRADE	Mechanical fixation method	Directly to the mold (only one mechanical fixation method allowed)	Use of a gear plate for some functional parts (allow different fixation method)	Use of a module for all the functional parts (allow different fixation method)
NONDESTRUCTIVE DISASSEMBLY 	Dissassembly depth ⁽⁶⁾	> 9	9 ≤ x < 7	≤ 7	
END OF LIFE					
RECYCLE 	Material separability	Not separable	/	All materials	
	Material compatibility with recycling ⁽⁷⁾	No	/	Yes	

Remarks:

- (1) The luminaire's efficacy is the ratio between the output flux (F) and the consumed power (P). This measurement is carried out at 500mA with the maximum number of LEDs. When this configuration is not available, the variant with the maximum number of LEDs and highest current will be measured.
- (2) The mechanical criteria takes into account the IP and IK level of the luminaire. Our criteria is as follows:

LEVEL 1	LEVEL 2	LEVEL 3
Any luminaire with an IP level equal or below IP 54	Any luminaire with an IK level equal or below IK 07. Or any luminaire with an IP level between IP 54 and IP 66	Any luminaire with an IP level equal or over IP 66 and an IK level equal or above IK 08

- (3) A luminaire is considered smart ready if it can integrate an IoT solution. An open smart solution is a Nema or Zagha (ZD4I) socket.
- (4) This factor ensures that it is feasible and practical for a professional to access components after the luminaire has been put into service.
- (5) The replacement parts should be the same as the originals, but if this is not possible, equivalent spare parts that perform the same function to the same or higher performance level may be used.
- (6) The disassembly depth is the minimum number of steps required to remove a component from a product.
- (7) The criteria focuses on the luminaire's main parts (body and reflector) with materials recognised by Schröder Group staff and R-Tech.



Schröder

Experts in lightability™



www.schreder.com

Copyright © Schröder S.A. 2020 - Executive Publisher: Stéphane Halleux - Schröder International Services S.A. - rue de Mons 3 - B-4000 Liège (Belgium) - The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.

