Schréder

Experts in lightability™

SHUFFLE



SHUFFLE is a connected, modular approach to city hardware - with its plugand-play rotatable modules that contain pre-certified hardware, it can be configured to suit your specific needs.

KEY ADVANTAGES

- > Robust design with highquality finish
- > Easy installation with patented mounting system
- > Compatible with a wide range of PTZ cameras

The SHUFFLE CAM BR are accessories that offer the possibility of integrating high-performing PTZ cameras into SHUFFLE columns. Created to complement the design of the SHUFFLE and enhance camera stability and safety, these versatile accessories can incorporate the majority of PTZ cameras available on the market.

These accessories were carefully designed to seamlessly integrate the SHUFFLE column with minimal disruption to the aesthetics and overall product design.

These accessories are built with the same high-grade materials — high-pressure, die-cast aluminium and gravity casting aluminium — with fasteners in stainless steel to ensure the same superior durability of the SHUFFLE.


They are then coated in a polyester powder paint that comes in a variety of colours to match the column identically and ensure a high-quality finish.



SHUFFLE


SHUFFLE CAM BR | CHARACTERISTICS

KEY FEATURES

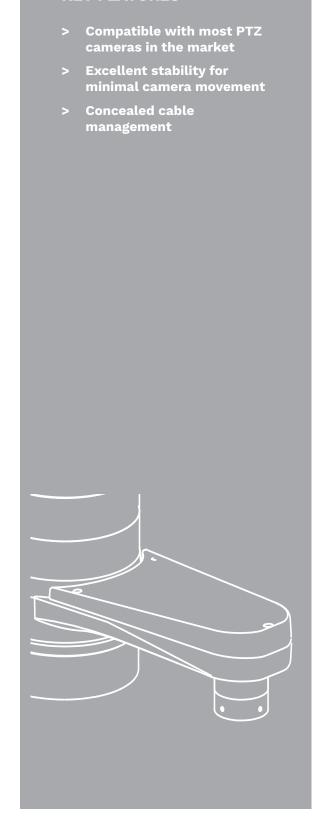

DIMENSIONS AND MOUNTING

With clamps AxBxC (mm inch)	490x216x196 19.3x8.5x7.7		
With cover AxBxC (mm inch)	490x213x196 19.3x8.4x7.7		
Weight (kg lbs)	7.7 17		
Aerodynamic resistance (CxS)	арох. 0.5		
Mounting possiblilities	Clamps		

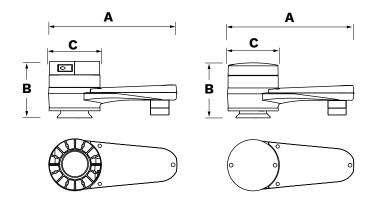

CAMERA INTERFACES

Bosch 1.5" NPT





1.5 NPT

Bosch M33





Hikvision






Huawei






Panasonic



Axis



Schréder

Experts in lightability™

SHUFFLE

SHUFFLE CAM BR | CHARACTERISTICS

CENEDA	
GENERA	_

Recommended installation height	2.3m to 6.8m 7.5' to 22.3'
CE mark	Yes
UKCA certified	Yes
UL mark	Yes
ROHS compliant	Yes

HOUSING AND FINISH

Housing	Aluminum
Housing finish	Polyester powder coating
Camera interface	Aluminium
Standard colour	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 08

ELECTRICAL

Power Consumption will depend on camera model installed

SHUFFLE				
SHUFFLE Pole model	2 doors same side 3 doors			
	Mains box Beyond light power supply box			
SHUFFLE Components	POE tray - POE inside pole Support plate network - POE outside pole			
	Network cable			
Position on pole	Any position			
Bracket quantity	Maximum 4 brackets on one pole			

INTERFACE AVAILABLE FOR CAMERA MODELS

AXIS Q37 AXIS P56 PTZ AXIS Q61 PTZ AXIS Q60 PTZ
Series 5000 7000 - 1.5" NPT or M33
Pro Series Ultra Series (Please consult us to check the model compatility)
IPC66 X67 M67
WV-X65

^{*} In addition to the camera support interface kits, some camera models need to be supplied with specific mounting parts to be combined with the interface kit (see table below)

BRACKET INTERFACE KITS

Brand/type Interface kit	Without interface kit	Axis Interface kit A	Bosch M33 Interface kit B	Bosch 1.5" NPT interface kit C	Hikvision Interface kit D	Huawei Interface kit H	Panasonic Interface kit P
Configurator code	GP	GQ	GR	H4	GS	GT	H9
5545	X	1.5"NPS	M33	1.5 NPT	Ø48	Ø50	1.5"