


FLEXIA BRASO



The ultimate solution for a unique lighting ambiance

Various designs, many configurations, one DNA. FLEXIA is the ultimate platform for creating a unique urban lighting solution. Focus on developing a distinctive ambiance for the people living in and visiting your spaces, instead of dealing with non-stop constraints. With no technical limitations, more design consistency and a guarantee of the latest innovations, FLEXIA offers a versatile technological platform with refined aesthetics. FLEXIA incorporates a elegant design with advanced, interchangeable technology compatible with the circular economy. Thanks to its environmentally-friendly concept, FLEXIA is an eco-responsible lighting solution that ensures the safety and well-being of both people and wildlife. Ideal for city centres, public squares, bike paths and other urban outdoor areas, FLEXIA delivers high-quality lighting with design consistency and lowers the carbon footprint for towns and cities - creating a safe and attractive environment.

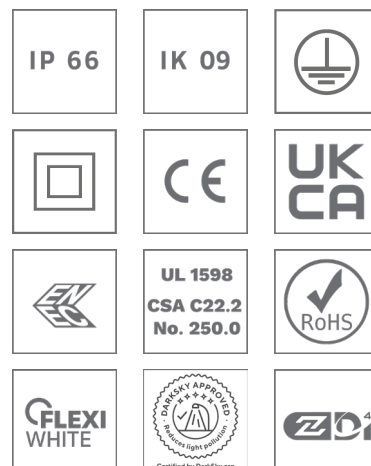

Concept

Originally designed in response to a specific lighting project, FLEXIA BRASO has now become an integral part of the FLEXIA luminaire range, adding its distinctive four-armed design built around the same cutting-edge technologies as the rest of the range.

Made of recyclable materials such as aluminium and glass, FLEXIA BRASO is designed to promote the principles of a circular economy through its easy accessibility, effortless servicing and interchangeable components.

This luminaire is an eco-friendly light source. Taking advantage of the flat glass version of FLEXIA (FLEXIA FG), with photometric engines delivering eco-responsible light, FLEXIA BRASO is compatible with the preservation of night life. It allows public lighting to be maintained while conserving the well-being of nocturnal fauna and flora.

FLEXIA BRASO is part of the FLEXIA range and shares the same technical architecture for more consistency and interchangeability. It relies on the LensoFlex® photometric engine, developed on a concept of performance, dark-sky compliance (PureNight) and versatility, and uses the same CR-Kit that regroups the LEDs, lenses, gear and electrical accessories on a tool-free removable unit. This standardisation of internal components enables easier and more cost-effective management of spare parts.

FLEXIA BRASO offers tool-free access to the gear compartment. For safety reasons, it includes instant electrical disconnection on opening.

More than an aesthetic solution, FLEXIA BRASO is a connected-ready luminaire benefiting from the latest connectivity options (NEMA or Zhaga) and sensors.



Inspired by the FLEXIA philosophy, FLEXIA BRASO enriches the range with a brand new four-armed design to create an attractive urban environment.



FLEXIA BRASO is Dark-Sky certified and provides eco-friendly lighting compatible with the preservation of nighttime flora and fauna.

TYPES OF APPLICATION

- URBAN & RESIDENTIAL STREETS
- BRIDGES
- BIKE & PEDESTRIAN PATHS
- CAR PARKS
- SQUARES & PEDESTRIAN AREAS

KEY ADVANTAGES

- Design consistency for all urban applications
- Tool-free philosophy: opening, cabling and LED engine removal
- PureNight: dark-sky and low-glare lighting distributions
- Connected-ready for your future Smart city requirements
- Based on open and interoperable standards
- Compatible with the Schröder EXEDRA control platform
- Zhaga-D4i certified



FLEXIA BRASO has been designed for easy maintenance and servicing.




FLEXIA BRASO is a connected-ready luminaire that can be equipped with optional NEMA or Zhaga sockets.



LensoFlex®4

LensoFlex®4 maximises the heritage of the LensoFlex® concept with a very compact yet powerful photometric engine based upon the addition principle of photometric distribution. The number of LEDs in combination with the driving current determines the intensity level of the light distribution. With optimised light distributions and very high efficiency, this fourth generation enables the products to be downsized to meet application requirements with an optimised solution in terms of investment.

LensoFlex®4 optics can feature backlight control to prevent intrusive lighting, or a glare limiter for high visual comfort.






Custom dimming profile

Intelligent luminaire drivers can be programmed with complex dimming profiles. Up to five combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

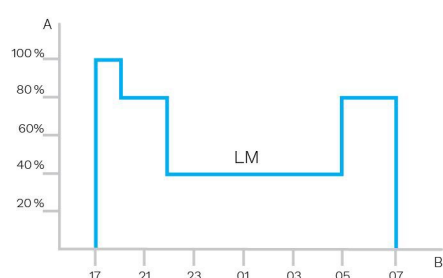

A. Dimming level | B. Time



Daylight sensor / photocell

Photocell or daylight sensors switch the luminaire on as soon natural light falls to a certain level. It can be programmed to switch on during a storm, on a cloudy day (in critical areas) or only at nightfall so as to provide safety and comfort in public spaces.




PIR sensor: motion detection

In places with little nocturnal activity, lighting can be dimmed to a minimum most of the time. By using passive infrared (PIR) sensors, the level of light can be raised as soon as a pedestrian or a slow vehicle is detected in the area.

Each luminaire level can be configured individually with several parameters such as minimum and maximum light output, delay period and ON/OFF duration time. PIR sensors can be used in an autonomous or interoperable network.



The Zhaga consortium joined forces with the DiiA and produced a single Zhaga-D4i certification that combines the Zhaga Book 18 version 2 outdoor connectivity specifications with the DiiA's D4i specifications for intra-luminaire DALI.

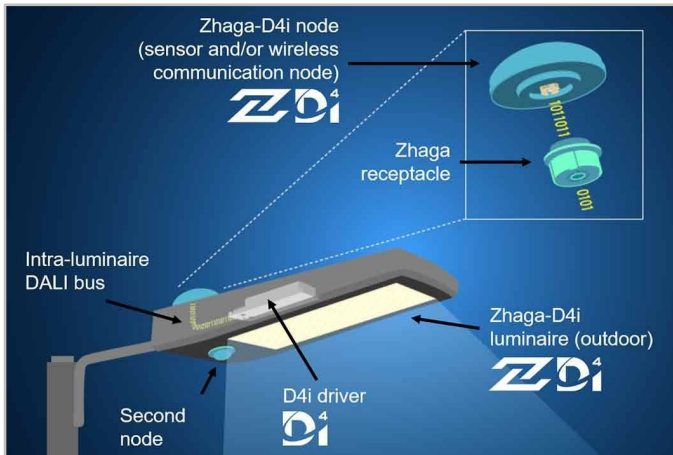

Standardisation for interoperable ecosystems



As a founding member of the Zhaga consortium, Schröder has participated in the creation of, and therefore supports, the Zhaga-D4i certification program and the initiative of this group to standardise an interoperable ecosystem. The D4i specifications take the best of the standard DALI2 protocol and adapt it to an intra-luminaire environment but it has certain limitations. Only luminaire mounted control devices can be combined with a Zhaga-D4i luminaire.

According to the specification, control devices are limited respectively to 2W and 1W average power consumption.

Certification program

The Zhaga-D4i certification covers all the critical features including mechanical fit, digital communication, data reporting and power requirements within a single luminaire, ensuring plug-and-play interoperability of luminaires (drivers) and peripherals such as connectivity nodes.

Cost-effective solution

A Zhaga-D4i certified luminaire includes drivers offering features that had previously been in the control node, like energy metering, which has in turn simplified the control device therefore reducing the price of the control system.

Schröder EXEDRA is the most advanced lighting management system on the market for controlling, monitoring and analysing streetlights in a user-friendly way.



Standardisation for interoperable ecosystems

Schröder plays a key role in driving standardisation with alliances and partners such as uCIFI, TALQ or Zhaga. Our joint commitment is to provide solutions designed for vertical and horizontal IoT integration. From the body (hardware) to the language (data model) and the intelligence (algorithms), the complete Schröder EXEDRA system relies on shared and open technologies. Schröder EXEDRA also relies on Microsoft Azure for cloud services, provided with the highest levels of trust, transparency, standards conformance and regulatory compliance.

Breaking the silos


With EXEDRA, Schröder has taken a technology-agnostic approach: we rely on open standards and protocols to design an architecture able to interact seamlessly with third-party software and hardware solutions. Schröder EXEDRA is designed to unlock complete interoperability, as it offers the ability to:

- control devices (luminaires) from other brands
- manage controllers and to integrate sensors from other brands
- connect with third-party devices and platforms

A plug-and-play solution

As a gateway-less system using the cellular network, an intelligent automated commissioning process recognises, verifies and retrieves luminaire data into the user interface. The self-healing mesh between luminaire controllers enables real-time adaptive lighting to be configured directly via the user interface. OWLET IV luminaire controllers, optimised for Schröder EXEDRA, operate Schröder's luminaires and luminaires from third parties. They use both cellular and mesh radio networks, optimising geographical coverage and redundancy for continuous operation.

Tailored experience




Schröder EXEDRA includes all advanced features needed for smart device management, real-time and scheduled control, dynamic and automated lighting scenarios, maintenance and field operation planning, energy consumption management and third-party connected hardware integration. It is fully configurable and includes tools for user management and multi-tenant policy that enables contractors, utilities or big cities to segregate projects.

A powerful tool for efficiency, rationalisation and decision making


Data is gold. Schröder EXEDRA brings it with all the clarity managers need to drive decisions. The platform collects massive amounts of data from end devices and, aggregates, analyses and intuitively displays them to help end-users take the right actions.

Protected on every side




Schröder EXEDRA provides state-of-the-art data security with encryption, hashing, tokenisation, and key management practices that protect data across the whole system and its associated services. The whole platform is ISO 27001 certified. It demonstrates that Schröder EXEDRA meets the requirements for establishing, implementing, maintaining and continually improving security management.

Mobile App: any time, any place, connect to your street lighting




The Schröder EXEDRA mobile application offers the essential functionalities of the desktop platform, to accompany all types of operator on site in their daily effort to maximise the potential of connected lighting. It enables real-time control and settings, and contributes to effective maintenance.

With the PureNight concept, Schröder offers the ultimate solution for restoring the night sky without switching off cities, while maintaining safety and well-being for people and preserving wildlife. The PureNight concept guarantees that your Schröder lighting solution satisfies environmental laws and requirements. Well-designed LED lighting has the potential to improve the environment in all respects.

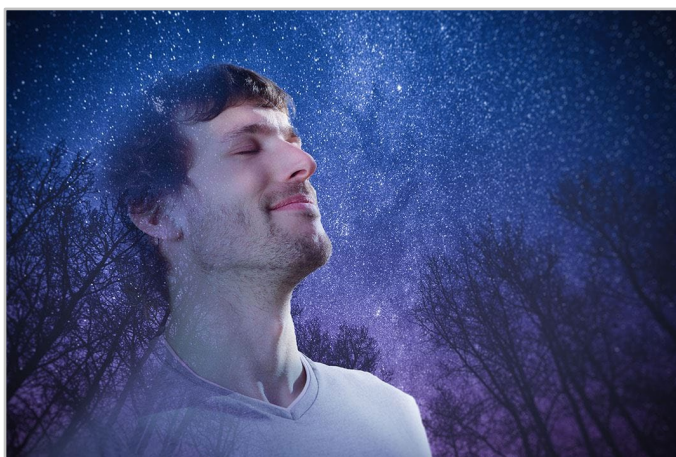

Offer maximum visual comfort to people



Because of the lower installation height compared to road lighting, visual comfort is an essential aspect of urban lighting. Schröder designs lenses and accessories to minimise any type of glare (distracting, discomforting, disabling glare and blinding glare). Our design offices harness a range of possibilities to find the best solutions for each project and ensure that we provide a gentle light that delivers the best night-time experience.


Protect wildlife



If not well designed, artificial lighting can badly affect wildlife. Blue light and excessive intensity can have a damaging effect on all types of life. Blue light radiation has the ability to suppress the production of melatonin, the hormone that contributes to the regulation of the circadian rhythm. It can also alter the behavioural patterns of animals including bats and moths, as it can change their movements towards or away from light sources. Schröder

favours warm white LEDs with minimal blue light, combined with advanced control systems including sensors. This enables permanent adaptation of the lighting to the real needs of the moment, minimising disturbance to the fauna and flora.

Direct the light only where it is wanted and needed



Schröder is renowned for its expertise in photometry. Our optics direct light only where it is wanted and needed. However, light trespass behind the luminaire might be a key concern when it comes to protecting a sensitive wildlife habitat or avoiding intrusive lighting towards buildings. Our fully integrated backlight solutions easily address this potential risk.

- Backlight Mini offers a 50% cut-off of the light output from the back of the luminaire and reduces the beam angle accordingly to circumscribe the proportion of light emitted to the rear.

- Backlight Maxi reduces the light output at the rear of the luminaire by over 80% (both in terms of luminous flux and beam angle).

1. Backlight Mini
2. Backlight Maxi

Choose a DarkSky Approved luminaire



DarkSky International is the recognised authority on light pollution. It provides leadership, tools and resources to industries and companies willing to reduce light pollution. The DarkSky Approved Luminaires Program certifies outdoor lighting fixtures as being Dark Sky Friendly. This luminaire is part of our approved range of luminaires that comply with the Approval Programme and provide light that is environmentally friendly in every way.

GENERAL INFORMATION	
FutureProof	Easy replacement of the photometric engine and electronic assembly on-site
Circle Light label	Score ≥90 - The product fully meets circular economy requirements
Driver included	Yes
CE mark	Yes
UKCA marking	Yes
ENEC certified	Yes
UL certified	Yes
ROHS compliant	Yes
Zhaga-D4i certified	Yes
FlexiWhite	Yes
DarkSky Approved	Yes
French law of December 27th 2018 - Compliant with application type(s)	a, b, c, d, e, f, g
Testing standard	LM 79-08 (all measurements in ISO17025 accredited laboratory)

· Meets the DarkSky Approved requirements when fitted with a clear protector

HOUSING AND FINISH	
Housing	Aluminium
Optic	PMMA
Protector	Tempered glass
Housing finish	Polyester powder coating
Standard colour(s)	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 09
Vibration test	Compliant with modified IEC 68-2-6 (0.34G)
Access for maintenance	Tool-less access to gear compartment

OPERATING CONDITIONS	
Operating temperature range (Ta)	-30°C up to +45°C / -22°F up to 113°F

· Depending on the luminaire configuration. For more details, please contact us.

ELECTRICAL INFORMATION	
Electrical class	Class 1 US, Class I EU, Class II EU
Nominal voltage	120-277V – 50-60Hz 220-240V – 50-60Hz
Surge protection options (kV)	10 20
Electromagnetic compatibility (EMC)	EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547
Control protocol(s)	1-10V, DALI
Control options	AmpDim, Bi-power, Custom dimming profile, Remote management
Socket	Zhaga (optional) NEMA 7-pin (optional)
Associated control system(s)	Schröder EXEDRA
Sensor	PIR (optional)

OPTICAL INFORMATION	
LED colour temperature	2200K (Warm White WW 722) 2700K (Warm White WW 727) 3000K (Warm White WW 730) 3000K (Warm White WW 830) 4000K (Neutral White NW 740) 1700-2200K (FlexiWhite) 1700-3000K (FlexiWhite) 1700-4000K (FlexiWhite) 2200-3000K (FlexiWhite)
Colour rendering index (CRI)	>70 (Warm White WW 722) >70 (Warm White WW 727) >70 (Warm White WW 730) >80 (Warm White WW 830) >70 (Neutral White NW 740)
ULOR	0%
ULR	0%


· DarkSky Approved when fitted with LEDs of 3000K or less.
· ULOR may be different according to the configuration. Please consult us.
· ULR may be different according to the configuration. Please consult us.

LIFETIME OF THE LEDS @ TQ 25°C	
All configurations	100,000h - L95


· Lifetime may be different according to the size/configurations. Please consult us.

DIMENSIONS AND MOUNTING

AxBxC (mm inch)	504x752x504 19.8x29.6x19.8
Weight (kg lbs)	12.0 26.4
Aerodynamic resistance (CxS)	0.11
Mounting possibilities	Post-top slip-over – Ø60mm

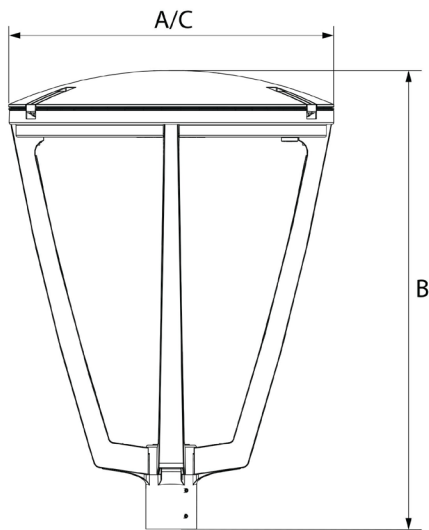

FLEXIA BRASO | Slip-over mounting Ø60mm - 6XM6 screws

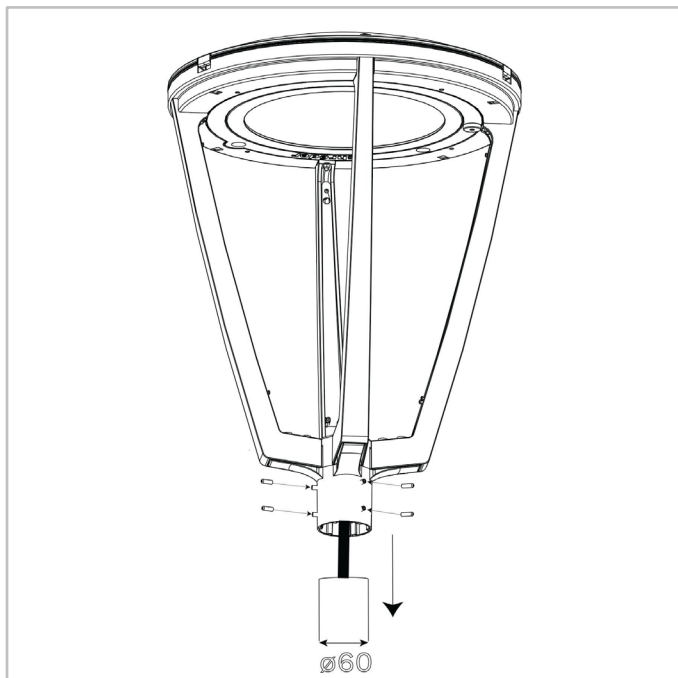



Luminaire output flux (lm)											Power consumption (W)		Luminaire efficacy (lm/W)
Warm White WW 722		Warm White WW 727		Warm White WW 730		Warm White WW 830		Neutral White NW 740					
Number of LEDs	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to
10	600	2000	600	2200	700	2400	600	2200	700	2600	7	22	135
20	1200	5700	1300	6300	1400	6700	1300	6300	1500	7300	13	64	142
30	1800	6600	2000	7200	2100	7700	2000	7200	2300	8400	19	66	149
40	2400	8700	2600	9600	2800	10300	2600	9600	3000	11200	25	87	151

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %

