

EVENS



With its refined and modern design, the EVENS bracket can be installed with a large range of Schröder luminaires, in both post-top and wall-mounted versions, without compromising on the aesthetics of your urban ensemble.

Composed of die-cast aluminium, it is available in all standard Schröder colours.

Certified for the loads defined in EN40, the Lyre bracket can be installed on poles with CE marking.


Technical information

GENERAL

Housing	Die-cast aluminum
Finish	Polyester powder-coating
Colour	AKZO 900 grey sanded Any RAL or AKZO colour upon request

Pull wire included	Yes
Sea-side coating	Available upon request

DIMENSIONS

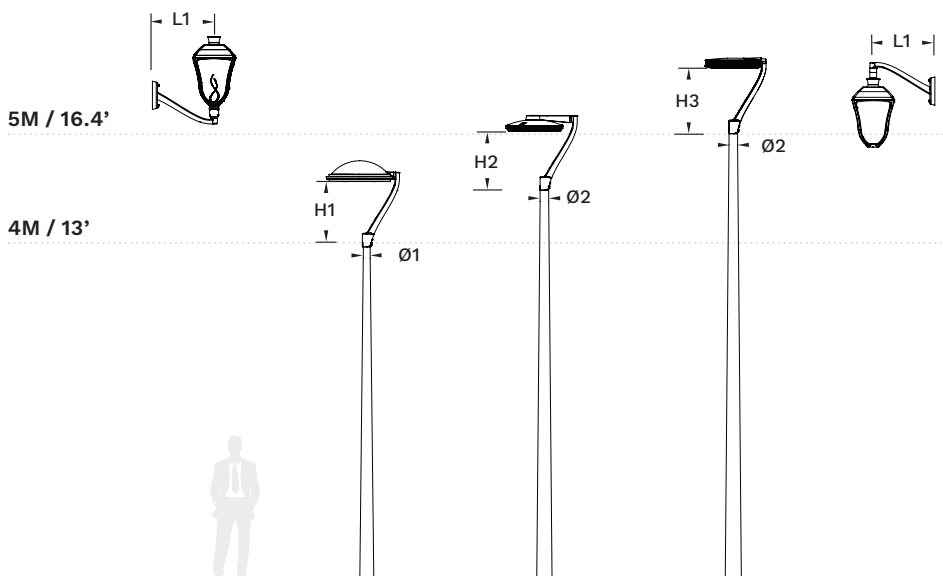

Ø1	60mm 2.4"	H1	575mm 22.6"
Ø2	76mm 3"	H2	520mm 20.5"
L1	545mm 21.5"	H3	580mm 22.8"

PRODUCT VARIANTS

Type	Height (mm)	Length	Reference	To pole			To luminaire	
				Diameter	Enclosing (female)	Lateral	Wall	Interface
Top	660	-	EVE001P	Pole Ø60 or Ø76 & Spigot Ø60 L70	X	-	-	Horizontal square 40x40
Top	660	-	EVE002P	Pole Ø60 or Ø76 & Spigot Ø60 L70	X	-	-	Lateral enclosing Ø60
Lateral & Wall	-	550	EVE012P	-	-	Ø>90mm	X	Suspended 1" gaz male
Lateral & Wall	-	550	EVE013P	-	-	Ø>90mm	X	Post-top enclosing Ø60

Note: this information is to be combined with the specific technical drawing

LUMINAIRE COMPATIBILITY FOR TOP VARIANTS

Family	Type	Reference	AMPERA	AXIA	CMS / CITEA NG			FLEXIA	PIANO	SENSO	TECEO	YMERA	YOA
			Universal 48-60mm	Lateral entry 42-60mm	Lateral entry 60 enclosing	Horizontal square 40x40 (mini-midi)	Rotule diam D60mm enclosing	E1 - Horizontal square 40x40	Lateral entry 48-60mm	All other lateral entry 48-60	Universal 48-60mm	Lateral entry 60	Lateral entry 60mm
EVENS	Square 40x40	EVE001P	-	-	-	X	-	X	-	-	-	-	-
EVENS	Enclosing Ø60	EVE002P	X	X	X	-	X	-	X	X	X	X	X

x = standard available

LUMINAIRE COMPATIBILITY FOR LATERAL & WALL VARIANTS

Family	Type	Reference	ALBANY	ALURA	CALLA	CMS MINI MIDI / CITEA NG		FLEXIA MIDI		FRIZA	HAPILED	INOA	ISLA	KIO	OYO	PILZEO	SHUFFLE POST TOP	STYLAGE	TWIXX	VALENTINO	ZELA	ZYLINDO	
			Suspended male on female 1"	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Suspended male on female 1"	Suspended male on female 1" adjustable	S3 - Suspended with 1" gas male	S5 - Suspended with knuckle with 1" male	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 6 screws	Post-top 60mm 2 screws	Post-top 60mm 2 screws	Suspended 1" male on female	Post-top 60mm 6 screws	Double arm post-top mounting	Post-top 60mm 6 screws	Post-top 60mm 6 screws
EVENS	Suspended luminaire 1"	EVE012P	X	-	-	X	X	X	X	-	-	-	-	-	-	-	-	X	-	-	-	-	-
EVENS	Post-top luminaire Ø60	EVE013P	-	X	X	-	-	-	-	X	X	X	X	X	X	X	X	-	X	X	X	X	X

x = standard available

INFORMATION FOR EN40 CALCULATION

Name	Reference	Type	Length (mm)	Centre of pressure on X (mm)	Centre of pressure on Z (mm)	Endpoint bracket on X (mounting point - mm)	Endpoint bracket on Z (mounting point - mm)	CxS (m ²)	Weight (kg)
EVENS 40x40	EVE001P	Post-Top	0	-125	290	-240	630	0.057	5
EVENS Ø60	EVE002P	Post-Top	0	-125	290	-240	630	0.057	5.3
EVENS for suspended luminaire 1"	EVE012P	Lateral & wall	550	283	134	545	103	0.057	4.9
EVENS for post-top luminaire Ø60	EVE013P	Lateral & wall	550	283	-134	545	-103	0.057	4.9

